Arioso®

Unmatched Versatility and Flawless Performance

MASTERPIECE collection

Day-Brite® Lighting

Arioso®

Modern commercial environments require lighting to be superior in both performance and aesthetics. The Arioso® family from Day-Brite® Lighting combines outstanding versatility with great visual appeal. Recessed, semi-recessed, surface, wall mount, sconce, and asymmetric models are available. Arioso® luminaires feature micro-perforated lamp shields lined with soft white overlays to balance direct and indirect light. This balance creates smooth, even lighting to make rooms feel comfortable and spacious. These products combine the crucial elements of style and function, making them ideal for contemporary lighting requirements. The innovation and quality of the Arioso® family reflects Day-Brite®'s dedication to providing the best in lighting systems.

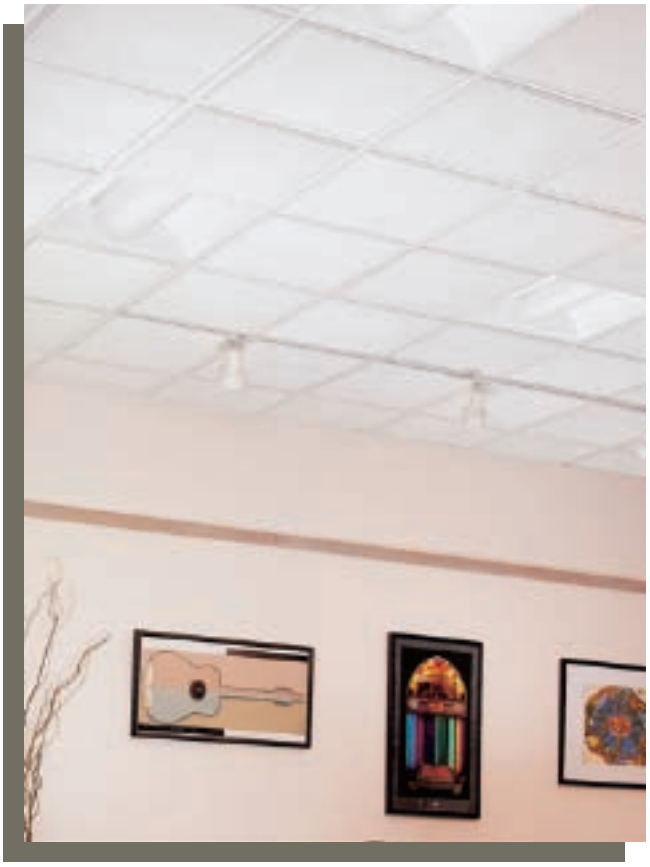

features

- Housing is multi-stage phosphate treated for maximum corrosion resistance. Finish is matte white polyester powder coating.
- Direct lighting component is provided by a perforated metal cover with a white acrylic overlay that minimizes lamp images.
- Indirect lighting component is provided by a partial parabolic shaped reflector painted matte white for soft uniform visual appearance.
- Swing down lamp covers allow easy relamping.
- Hardware is concealed for smooth, seamless aesthetics.
- "F" Mounting Kits may be used for drywall or plaster applications.

wall

Arioso® wall is a surface wall-mounted direct/indirect luminaire offering smooth asymmetric lighting with classic styling. Continuous rows installed on the wall at the ceiling provide an integrated appearance. It is also suitable for use lower on the wall in rows or as a sconce and complies with ADA requirements for these applications. Uplight option with lens features a smooth uplight distribution for applications lower on the wall.

dimensions



4-9/16" (116mm)

4" (102mm)

ordering

SAMPLE CATALOG NUMBER: AVW232-PMW-120-1/2-EB

[ ] [ ] [ ] – [ ] – [ ] – [ ]

FIXTURE FAMILY

AVW– Arioso Wall

LAMP TYPE/WATTAGE

14 – 14wT5 (22")
17 – 17wT8 (24")
24HO – 24wT5HO (22")
21 – 21wT5 (34")
25 – 25wT8 (36")
39HO – 39wT5HO (34")
28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE

120
277
347
UNV - Universal voltage, 120-277 volt (40wTT5 only)

NO. OF LAMPS

(not included)
1
2

SHIELDING

PMW – Perforated Metal with White Overlay

OPTIONS

See catalog or specification sheets for details.

recessed



Recessed Arioso® units fit standard grid (NEMA G) ceilings and may be row mounted. They provide soft balanced lighting suitable for private offices and boardrooms, as well as larger open areas. The 1x4, 2x2, and 2x4 are excellent alternatives to more traditional lensed luminaires. The 1x1 is ideal for small circulation spaces and corner applications and is the perfect complement to the 1x4 luminaire for row ends.

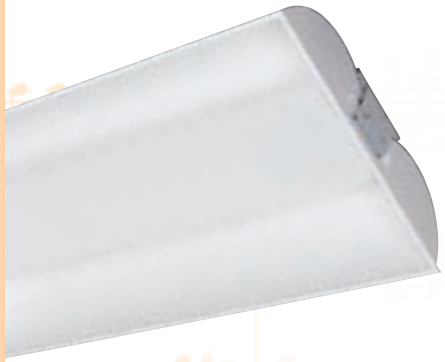

dimensions

1 x 1



5" (127mm)

12" (305mm)

1 x 4



5" (127mm)

12" (305mm)

2 x 2
2 x 4



5-1/2" (140mm)

24" (610mm)

ordering

SAMPLE CATALOG NUMBER: 2AVG232-PMW-120-1/2-EB

[ ] [ ] [ ] [ ] [ ] – [ ] – [ ] – [ ]

WIDTH
1 – 1'
2 – 2'

FAMILY
AV– Arioso

CEILING TYPE
G – Grid*

*Contact manufacturer's rep for screw slot applications.

NO. OF LAMPS
(not included)
1
2
3
4

LAMP TYPE/WATTAGE
14 – 14wT5 (22")
17 – 17wT8 (24")
CF18 – 18wTT5 (9")
24HO – 24wT5HO (22")
28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

SHIELDING
PMW – Perforated Metal with White Overlay

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

OPTIONS
See catalog or specification sheets for details.

surface

For areas with limited plenum space requiring surface mounting, Arioso® surface features rounded edges for a smooth, subtle appearance. The contoured 2-1/4" housing creates the perception of a very low profile luminaire. A flexible mounting system allows easy installation with no visible hardware. The gently curved styling blends with the ceiling and matches the Arioso semi-recessed.

dimensions

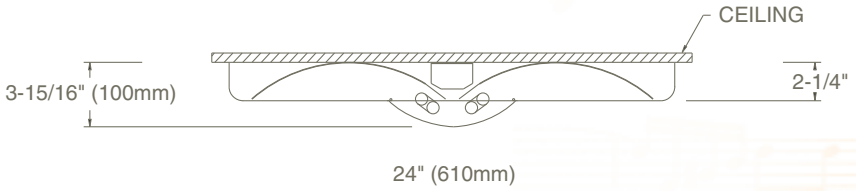

ordering

SAMPLE CATALOG NUMBER: 2SAVC2CF40-PMW-120-1/2-EB

[ ] [ ] [ ] [ ] – [ ] – [ ] – [ ]

FIXTURE FAMILY
SAVC– Surface Arioso Ceiling Mount

LAMP TYPE/WATTAGE
28 – 28wT5 (46")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

WIDTH
2 – 2'

NO. OF LAMPS
(not included)
2

SHIELDING
PMW – Perforated Metal with White Overlay

OPTIONS
See catalog or specification sheets for details.

side basket

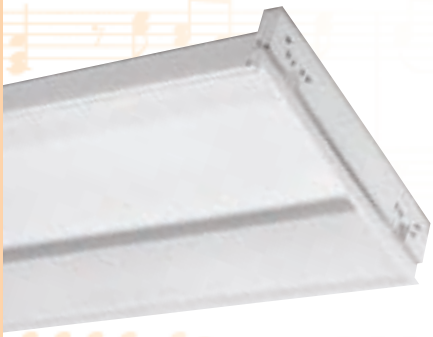

The Arioso® side basket fits standard grid (NEMA G) ceilings and may be row mounted. Side mounted opposing lamp covers combine with a seamless curved reflector to provide visual interest and balanced direct and indirect illumination. Four lamp cross sections provide high light levels without glare.

dimensions

5-1/2" (140mm)

24" (610mm)

ordering

SAMPLE CATALOG NUMBER: 2AVSG232-PMW-120-1/2-EB

[ ] [ ] [ ] [ ] [ ] – [ ] – [ ] – [ ]

WIDTH
2 – 2'

CEILING TYPE
G – Grid

LAMP TYPE/WATTAGE
14 – 14wT5 (22")
17 – 17wT8 (24")
24HO – 24wT5HO (22")
28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

FAMILY
AVS– Arioso Side Basket

NO. OF LAMPS
(not included)
2
4

SHIELDING
PMW – Perforated Metal with White Overlay

OPTIONS
See catalog or specification sheets for details.

asymmetric

The Arioso® asymmetric is a 1x4 recessed direct/indirect luminaire that fits standard grid (NEMA G) ceilings and may be row mounted. Matching the styling of the other Ariosos, this luminaire features a single side-mounted perforated lamp cover with a soft white overlay for smooth balanced lighting. The asymmetric light distribution projects soft uniform illumination onto a wall or vertical surface without creating glare.

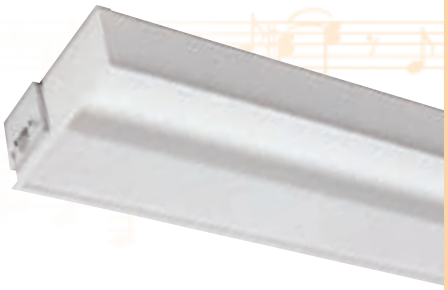

dimensions



ordering

SAMPLE CATALOG NUMBER: 1AVAG132-PMW-120-1/1-EB

[ ] [ ] [ ] [ ] [ ] – [ ] – [ ] – [ ]

WIDTH
1 – 1'

CEILING TYPE
G – Grid

LAMP TYPE/WATTAGE
28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

FAMILY
AVA– Arioso Asymmetric

NO. OF LAMPS
(not included)
1
2

SHIELDING
PMW – Perforated Metal with White Overlay

OPTIONS
See catalog or specification sheets for details.

semi-recessed

Arioso® semi-recessed fits standard T-bar ceilings and may be row mounted. Gently contoured lines complement the ceiling perspective. Minimal recessed housing depth makes this luminaire ideal for applications with limited plenum space. Styling is matched to the Arioso surface for mixed mounting applications.

dimensions

1 x 4



2 x 2
2 x 4

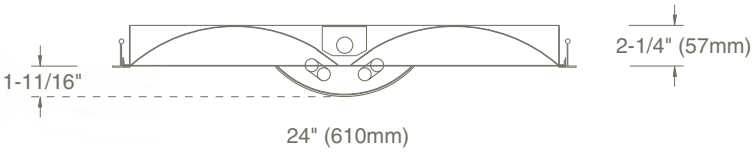

ordering

SAMPLE CATALOG NUMBER: 2AVLG2CF40-PMW-120-1/2-EB

WIDTH
1 – 1'
2 – 2'

FAMILY
AVL– Arioso Low Profile

CEILING TYPE
G – Grid

NO. OF LAMPS
(not included)
1
2
4

LAMP TYPE/WATTAGE
14 – 14wT5 (22")
24HO – 24wT5HO (22")
28 – 28wT5 (46")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

SHIELDING
PMW – Perforated Metal with White Overlay

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

OPTIONS
See catalog or specification sheets for details.

louver

Arioso® louver fits standard grid (NEMA G) ceilings and may be row mounted. This luminaire is designed for areas where higher light levels are needed. It features a solid or perforated flat blade louver with a white acrylic overlay and perforated curved side panels. With no visible welding or hardware, a seamless reflector, and balanced visual brightness, the Arioso louver complements any space with its clean, aesthetic appearance.

dimensions



5-1/2" (140mm)

24" (610mm)

ordering

SAMPLE CATALOG NUMBER: 2AVG232-LMWS-120-1/2-EB

[ ] [ ] [ ] [ ] [ ] – [ ] – [ ] – [ ]

WIDTH
2 – 2'

CEILING TYPE
G – Grid*

*Contact manufacturer's rep for screw slot applications.

LAMP TYPE/WATTAGE
14 – 14wT5 (22")
17 – 17wT8 (24")
24HO – 24wT5HO (22")
28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE
120
277
347
UNV - Universal voltage, 120-277 volt

FAMILY
AV– Arioso

NO. OF LAMPS
(not included)
2
3
4

SHIELDING
LMWS – Matte white perf. lamp cover with solid louver blades
LMWP – Matte white perf. lamp cover with perf. louver blades

OPTIONS
See catalog or specification sheets for details.

sconce

The Arioso® sconce may be wall or ceiling mounted and offers soft subtle lighting in a contemporary design with no visible hardware. This luminaire is capable of providing high illumination levels that brighten a wall or a room without sacrificing needed space. The Arioso sconce can provide slim rows of smooth lighting (not for through wiring) or add a lighting accent. In addition, the sconce is ADA compliant when wall mounted, assuring that it will not be obtrusive.

dimensions



4" (102mm)

9" (229mm)

ordering

SAMPLE CATALOG NUMBER: AVS2CF40-PMW-120-1/2-EB

[ ] [ ] [ ] – [ ] – [ ] – [ ]

FAMILY

AVS– Arioso Sconce

LAMP TYPE/WATTAGE

28 – 28wT5 (46")
32 – 32wT8 (48")
54HO – 54wT5HO (46")
CF40 – 40wTT5 (24")
CF50 – 50wTT5 (24")
CF55 – 55wTT5 (24")

VOLTAGE

120
277
347
UNV - Universal voltage, 120-277 volt

NO. OF LAMPS

(not included)
2
4

SHIELDING

PMW – Perforated Metal with White Overlay

OPTIONS

See catalog or specification sheets for details.

product guide

Arioso® recessed
AVG - PMW
page 3

Arioso® louver
AVG - LMW
page 4

Arioso® side basket
AVSG
page 5

Arioso® asymmetric
AVAG
page 6

Arioso® semi-recessed
AVLG
page 7

Arioso® surface
SAVC
page 8

Arioso® sconce
AVS
page 9

Arioso® wall
AVW
page 10



Day-Brite® Lighting
776 South Green Street
Tupelo, MS 38804
phone: 662-842-7212
fax: 662-841-5501
www.daybritelighting.com

MASTERPIECE collection

Form #137.1103IMEC.5M